


# Examples for customer-specific products

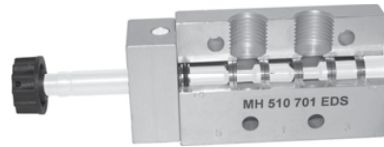

## Version EDS and BMF

For applications where a valve with an aluminum body is appropriate but brass is not, we can deliver selected models either „brass-free to the outside“ (version EDS) or totally „brass-free“ (version EDS).

### Materials used:

	EDS	BMF
	<i>Brass-free to the outside</i>	<i>Entirely brass-free</i>
Body and head	Aluminum	Aluminum
Manual override	1.4404	1.4404
Operator tube	Stainless steel	Stainless steel
Seat below plunger	Brass	1.4404
Sealing system	Brass / NBR	1.4404 / PUR
Spool	Stainless steel	Stainless steel
Piston	Brass / NBR	1.4404 / PUR
Rubber parts	FKM	FKM
Endcap	1.4404	1.4404
Screws	A2	A2



## MSV 311 030

Direct actuated 3/2-way valve for vacuum use, orifice size 3 mm.




## MHP 520 501

G 1/8" 2-position valve, actuated from one side pneumatically, from the other side with a solenoid. Also available with external pilot-feed and in other sizes.



## RS 4

Connection for operator of direct actuated 3-way-valves can be used to capture exhaust for n.c. valves as well as supply for n.o. valves. Standard: 2, 4, 6 stations, others on request.



## MH 541 701

5/4-way solenoid valve, actuated by permanent signal.



## MH 510 714 B

5/2-way solenoid valve with an orifice size of 7 mm for the packaging industry. Valve is actuated by permanent signal and equipped with air spring return. A version for valve terminal assembling is also available, type MH 510 714 BT.



## MH 510 704 J

Range of 35 mm wide valves with an orifice size of 7 mm for the packaging industry. Range consists of single and double solenoid valves as well as of 5/3-way valves. Pilot actuated products are also available.